



## Recommendations for elastic bearing

Static load: up to [N/mm<sup>2</sup>]

**3.00**

Dynamic load: up to [N/mm<sup>2</sup>]

**4.50**

Load peaks: up to [N/mm<sup>2</sup>]

**10.5**

Values depending on form factor and apply to form factor  $q = 3$

**Material** closed cellular polyether-urethane

**Colour** blue

### Delivery specifications

**Thickness:** 12.5 mm and 25 mm

**Mats:** 0.5 m wide, 2.0 m long

**Stripes:** max. 2.0 m long

Other dimensions on request (also stamping and moulded parts)


Properties	Value	Test method	Comment
Mechanical loss factor <sup>(1)</sup>	0.09	DIN 53513 <sup>(2)</sup>	guide value
Static E-modulus <sup>(1)</sup>	17 N/mm <sup>2</sup>	DIN 53513 <sup>(2)</sup>	
Dynamic E-modulus <sup>(1)</sup>	43 N/mm <sup>2</sup>	DIN 53513 <sup>(2)</sup>	
Static shear modulus <sup>(1)</sup>	1.93 N/mm <sup>2</sup>	DIN 53513 <sup>(2)</sup>	preload 3.0 N/mm <sup>2</sup>
Dynamic shear modulus <sup>(1)</sup>	4.0 N/mm <sup>2</sup>	DIN 53513 <sup>(2)</sup>	preload 3.0 N/mm <sup>2</sup> , 10 Hz
Resistance to strain	2.3 N/mm <sup>2</sup>		at 10% deformation
Residual compression set	< 5%	DIN EN ISO 1856	50%, 23°C, 70 h, 30 min after unloading
Operating temperature	-30 to +70 °C		
Temperature peak	+120 °C		
Inflammability	Class E / EN 13501-1	EN ISO 11925-1	normal flammable

<sup>(1)</sup> measured at maximum limit of static application range

<sup>(2)</sup> test according to DIN 53513

All information and data is based on our current knowledge. The data are subject to typical manufacturing tolerances and are not guaranteed. We reserve the right to amend the data.


**Load deflection curve**

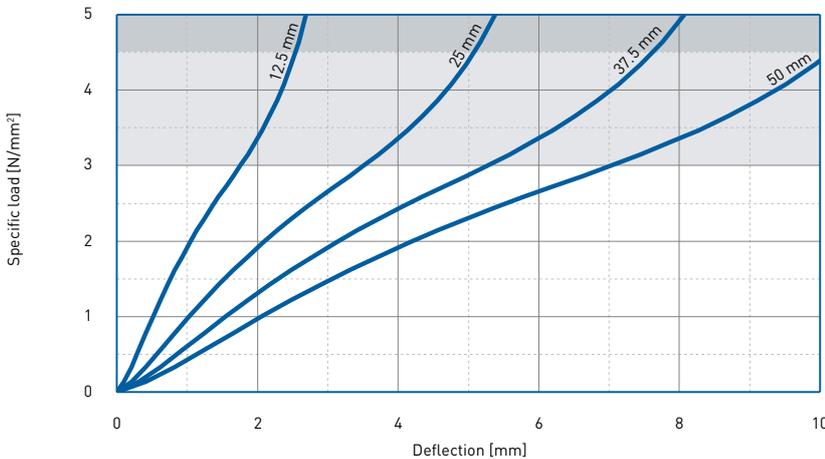

Recording of the 3rd loading; testing between steel plates with emery cloth of granulation K 120 at room temperature measured at  $v = 0.2 \text{ N/mm}^2 / \text{sec}$

Form factor  $q = 3$

**Modulus of elasticity**

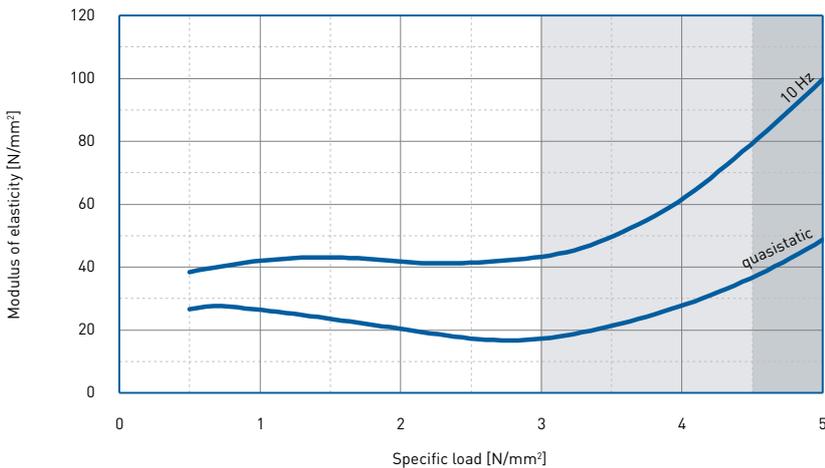


Dynamic test: sinusoidal excitation with an oscillating range of  $\pm 0.11 \text{ mm}$  at 10 Hz

Quasistatic modulus of elasticity: tangent modulus taken from the load deflection curve

Test according to DIN 53513  
Form factor  $q = 3$

**Natural frequency**

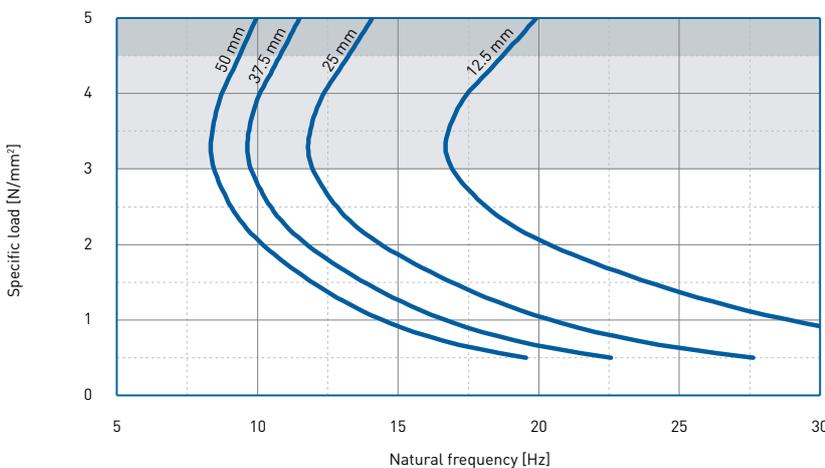

Natural frequency of a single-degree-of-freedom system consisting of a fixed mass and an elastic bearing consisting of PURASYS **vibradyn** HL 3000 on a stiff subgrade.

Form factor  $q = 3$


**DISCLAIMER:**

The information provided is intended only as a summary and general overview on matters of interest. The information is not intended to be comprehensive nor does it constitute expert advice. KRAIBURG PuraSys shall not be liable for incidental and/or consequential damages directly or indirectly sustained, nor any loss caused by not complying with relevant industry/product standards and improper use of any PURASYS vibrafoam products. Due to varying construction methods, any other circumstances not stated above should be brought to the attention of KRAIBURG PuraSys for review. For suitability to the prevailing site conditions, it is advised that certified testing should be conducted. It is recommended to seek further advice on your application with our technical staff prior to use.


The data sheet is not subject to any change service! All information is without guarantee.  
Latest version of this document available on [www.kraiburg-purasys.com](http://www.kraiburg-purasys.com)

**Correction values varying form factors**  
specific load 3.0 N/mm<sup>2</sup>, form factor q = 3


**Static load range**

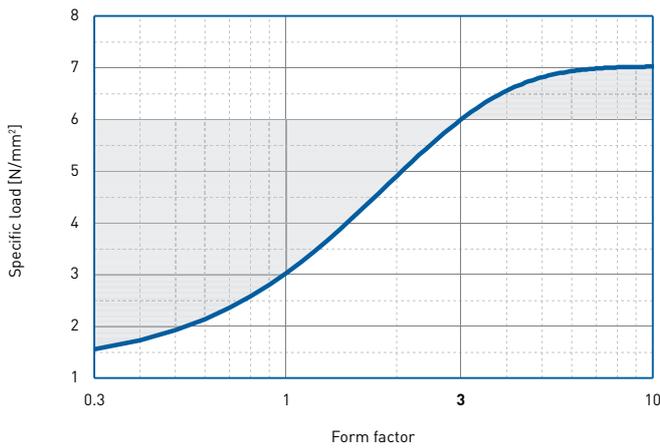


**Deflection**

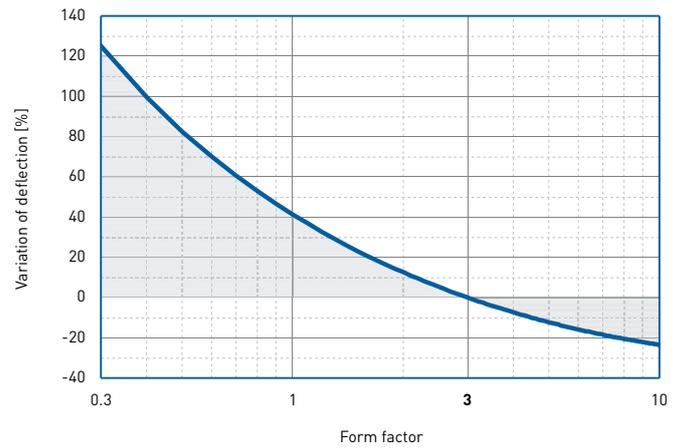

**Dynamic modulus of elasticity at 10 Hz**

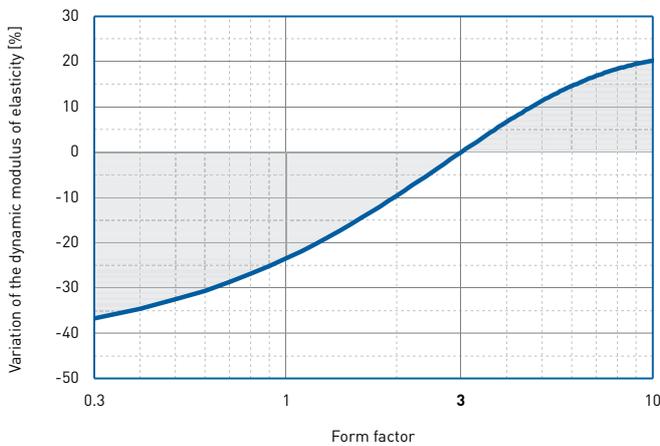

**Natural frequency**

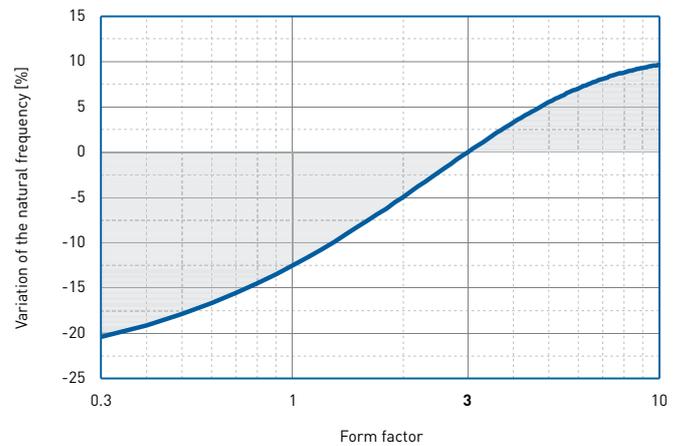

**DISCLAIMER:**

The information provided is intended only as a summary and general overview on matters of interest. The information is not intended to be comprehensive nor does it constitute expert advice. KRAIBURG PuraSys shall not be liable for incidental and/or consequential damages directly or indirectly sustained, nor any loss caused by not complying with relevant industry/product standards and improper use of any PURASYS **vibradyn** products. Due to varying construction methods, any other circumstances not stated above should be brought to the attention of KRAIBURG PuraSys for review. For suitability to the prevailing site conditions, it is advised that certified testing should be conducted. It is recommended to seek further advice on your application with our technical staff prior to use.

The data sheet is not subject to any change service! All information is without guarantee.  
Latest version of this document available on [www.kraiburg-purasys.com](http://www.kraiburg-purasys.com)